

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)


PCT

(10) International Publication Number
WO 2004/017598 A1

- (51) International Patent Classification⁷: **H04L 29/06**, H04Q 7/32
- (21) International Application Number: PCT/IB2003/003374
- (22) International Filing Date: 19 August 2003 (19.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0210463 19 August 2002 (19.08.2002) FR
- (71) Applicants (for all designated States except US): **SCHLUMBERGER SYSTEMES** [FR/FR]; 50 avenue Jean-Jaurès, F-92120 Montrouge (FR). **SCHLUMBERGER MALCO** [US/US]; 9800 Reistertown road, Owings Mills, MD 21117 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SENDRA, François** [FR/FR]; 9 square Saint Charles, F-75012 Paris (FR).
- (74) Common Representative: **SCHLUMBERGER SYSTEMES**; C/O Schlumberger Systèmes, 50 avenue Jean-Jaurès, F-92120 Montrouge (FR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv)) for US only
- Published:
— with international search report

[Continued on next page]

(54) Title: SECURED METHOD TO EXCHANGE DATA BETWEEN A BROWSER AND A WEB SITE

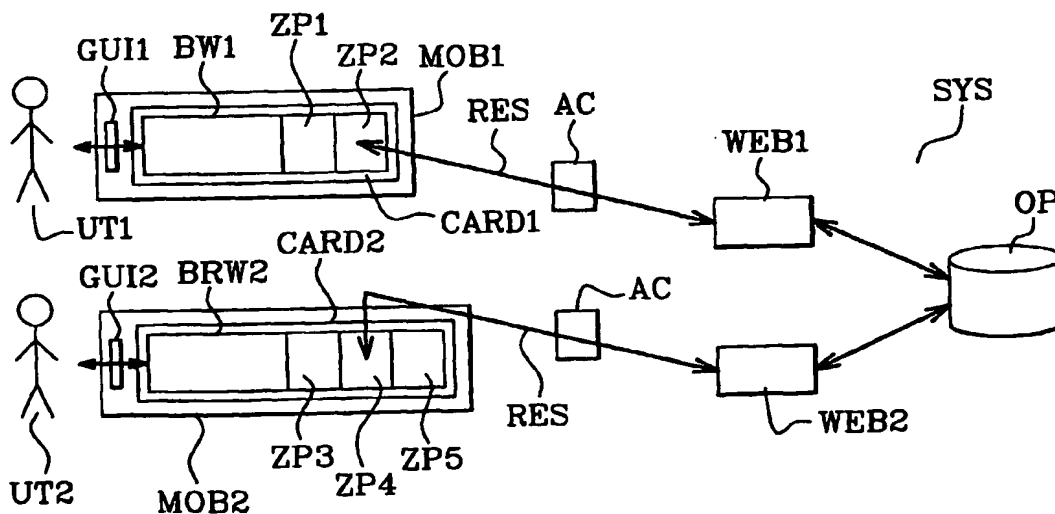

(57) Abstract: The invention concerns a communication between a data processing device (MOB1) and a number of resources (WEB1, WEB2) via a browser (BW1). According to the invention, the browser (BW1) comprises a number of private zones (ZP1-ZP2). Each private zone can be allocated to a respective set of resources (WEB1) and can store security information ensuring secured communication between a private zone (ZP1) and the set of resources (WEB1). In addition, the device comprises a plug-in ensuring that a set of resources (WEB1) communicates exclusively with the private zone (ZP1) allocated to it.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Secured method to exchange data between a browser and a WEB site.**Technical field**

5 The invention concerns a secured method to exchange data between two data processing devices. This invention applies especially to a data exchange between a device including preferably a smart card equipped with a browser and at least one computer resource such as a WWW (World Wide Web) site more commonly called a WEB site, or a server including services, or any other system which can exchange data with the browser.

10 Any type of device can be coupled with the smart card. This device can be onboard or not. Note that an onboard system is for example a mobile telephone, an electronic assistant, a portable computer, etc.

The method of the invention applies especially to communications using a symmetric type encryption algorithm.

15 The example which will be used to illustrate the invention will be that of a smart card coupled to an onboard system communicating with a number of WEB sites.

State of the Art

20 A card generally includes a web browser, also called navigation software by those skilled in the art. This browser enables a mobile telephone to access on line services or WAP type local services.

To perform a secured data exchange between a browser stored in the smart card and a WEB site, cryptographic means are used, such as encryption
25 or an electronic signature.

There are two types of cryptography:

- traditional cryptography using symmetric keys,
- public key cryptography using asymmetric keys.

30 Use of public key cryptography requires a large amount of memory. It is extremely difficult to implement in a smart card where the memory size is limited in terms of the number of bytes. Most browsers therefore use symmetric key

- cryptography. The use of symmetric key cryptography, however, also causes problems in a smart card. The browser is in fact unable to store all the keys of all the WEB sites it communicates with. Consequently, when the browser user wants to make a secured data exchange with a WEB site, the WEB site must first transmit the keys to the browser in order to use them afterwards during encryption and/or signature operations. The problem today is that the WEB sites refuse to share their keys with other WEB sites. In other words, if a WEB site "A" installs keys in a browser for later use, this WEB site "A" will not allow WEB site "B" to erase them or use them.
- 10 This situation creates a "security breach" for the secured transactions based on symmetric encryption and, consequently, a lack of trust from both WEB site users and owners/managers.

The invention

- 15 One objective of the invention is to obtain better trust when using the smart card to make transactions.

The invention concerns a smart card comprising a browser to communicate with a WEB site including WEB pages, characterised in that the browser comprises a number of private zones (ZP1-ZP2), where each private zone can be allocated to a respective set of resources (WEB1) to store information, said device comprising a plug-in (VBA) designed to guarantee that a set of resources (WEB1) communicates exclusively with the private zone (ZP1) allocated to it.

- 25 A private zone comprises application data used to set up a secured link with a set of resources. This data may consist of symmetric encryption keys, resident pages, etc.

Note that a set of resources can include one or more WEB sites.

In the card therefore, each zone can be allocated to a particular set of WEB sites. The application data forming each private zone can therefore only be accessed by the set of WEB sites concerned, thereby preventing another set of WEB sites from using a zone which has not been allocated to it.

5

It will be easier to understand the invention on reading the description below, given as an example and referring to the attached drawings.

In the drawings:

10 Figure 1 is a view of a computer system on which the invention can be applied.

Figure 2 is a view of the two major steps forming a secured transaction.

Figure 3 is a diagrammatic view of the various steps illustrating an example of data exchange between a browser and a number of WEB sites.

15 Figures 4 to 6 are diagrammatic views of the input and output parameters of program examples implementing the invention.

Detailed description of an example illustrating the invention

20 To simplify the description, the same elements concern the same references.

Figure 1 represents a computer system SYS. In our illustrated example, this system includes two browsers (BW1-BW2) stored in a respective smart card (CARD1-CARD2). In our example of realisation, each smart card (CARD1-CARD2) is coupled to a respective mobile telephone (MOB1-MOB2). Note that a
25 browser can be stored either in the card or in the mobile telephone.

A browser can communicate via a network RES with a number of sites WEB1 and WEB2 managed, in our example, by a manager OP. Generally, there is an access provider AC on the network between the browser BW1-BW2 and a site WEB1-WEB2. Other components may of course be inserted, but they are
30 not essential in the description of the invention.

In our example, each user UT1-UT2 interacts with the respective browser BW1-BW2 via a respective graphic user interface GUI1 and GUI2.

According to the invention, each browser BW1 and BW2 includes private zones ZP1-ZP2 and ZP3-ZP5, respectively. Each private zone includes
5 application data.

For security reasons, these zones are stored in the smart card. The zones can therefore only be accessed by the user who owns the smart card.

Preferably, each zone includes:

- a parameter VASid identifying the private zone in question. Preferably,
10 this value is a default value;
- a key VMK; this key VMK will be known as the master key in the remainder of the description;
- possibly, a home page specific to the private zone;
- possibly, a set of resident pages associated with the home page;

15

Preferably, the value of the key VMK is entered before using the private zone.

In our illustrated example, the method includes two main steps:

20

- A) the authentication AUT,
- B) the administration ADM.

An example illustrating the method of the invention is given below, in
25 reference to figures 2 and 3. Note that in this example, we consider that user UT1 wants to communicate with the site WEB1. In order to simplify the description of the invention, the card CARD1 and the mobile telephone MOB1 have not been shown on figure 3; only the browser BW1 is shown.

A) Authentication**Step 1**

Initially, user UT1 wants to obtain a service from the site WEB1 and communicate in complete security with this site.

- 5 In our example, the user contacts the administrator of the site WEB1 and supplies the name of the manager OP of the browser BW1; the purpose of this manager is in particular to supply certain parameters to the site WEB1 enabling it to communicate with the private zone it was allocated and not another private zone.
- 10 The user can also give the name of the access provider AC to the administrator of the site WEB1. In this case, in step 2, the site WEB1 contacts the manager OP via the access provider AC (this case is represented by the dotted lines on figure 3).

15 **Step 2**

- In our example of realisation, a plug-in is executed when the WEB site wants to be allocated a private zone. The main purpose of this plug-in is to query the manager OP. During a second step, the site WEB1 contacts the manager OP.
- 20 This manager stores a private zone allocation table. For each zone in the browser therefore, this manager can determine whether or not it is allocated to a WEB site. Preferably, this manager OP is centralised. Several decentralised managers would also be possible. In this case, the system requires a tool to synchronise the data between the various managers, since a given zone cannot
- 25 be allocated to two different WEB sites.

Step 3

- During a third step, a program OPG stored in the manager OP supplies to the site WEB1 all information required to carry out secured data exchange with a
- 30 particular private zone. In our example of realisation, the manager supplies to the site WEB1:

- the identifier VASid identifying the allocated private zone in question.

Advantageously, the manager also supplies

- the key VMK to guarantee secured communication between an allocated zone and the site WEB1.
5. - and possibly other information such as
- the sizes of a home page and the resident pages in the card;
 - the number of resident pages;
 - the browser identifier BWid.

10 **Step 4**

In our example of realisation, the administrator of the site WEB1 sends to the user, during the fourth step, the following parameters

- an identifier USERID
- a password PW

15 Preferably, the transmission is performed by a secured means such as by post.

In our example of realisation, the site WEB1 also stores these two parameters in a memory, or a database BDD it is connected to, for future use.

20 **Step 5**

During a fifth step, in our example of realisation, the site WEB1 sends to the browser BW1 a page including fields to be completed. In our example, these fields correspond:

- to the identifier USERID;
- 25 - and to the password PW.

These last two parameters form an access key to the zone.

In our example, this page includes a reference which can activate a plug-in VBA installed in the card.

Step 6

During a sixth step, the browser executes the plug-in VBA. The plug-in VBA has an authentication function and its main purposes are

- to prompt the user to enter his identifier USERID and his password PW
- 5 - and to build a query including for example the identifier USERID and the password PW.

The various execution phases of this plug-in VBA are listed below:

Plug-in VBA:

- 10 In our example of realisation and in reference to figure 4, this plug-in includes input parameters PE1 and output parameters PS1.

The input parameters PE1 are:

- the value of the identifier VASid of the private zone allocated to the site WEB1
- 15 - and references, i.e.:
 - the user identifier USERID
 - the user password PW.

The output parameters PS1 are:

- 20 - the value of the identifier VASid
- the value of the identifier USERID
- the value of the identifier of the browser BW
- the encrypted value of the password PW
- security data such as a random number, a signature, etc.
- 25 These output parameters are stored as a query generated during phase 5 described below.

In our example of realisation, the execution of this plug-in includes several phases:

Phase 1

- 30 During the first phase, the plug-in VBA selects the private zone corresponding to the identifier VASid.

Phase 2

During a second phase, the plug-in stores the value of the identifier USERID in the private zone.

Phase 3

5 During a third phase, the plug-in calculates a session key using the master key VMK known both by the browser and the site WEB1, as well as other parameters such as the identifier VASid, the random number, etc. This session key is calculated using several items of information: VMK, BWid, a random number, etc. In our example of realisation, this key plays a very
10 temporary role. It is only used to encrypt the user password.

Phase 4

During a fourth phase, the plug-in encrypts the password using the session key.

Phase 5

15 During a fifth phase, the plug-in builds a query.

Step 7

A seventh step consists for the card of transmitting the query to the site WEB1.

20

Step 8

... The site WEB1 checks the query received, in this case the identifier USERID and the password PW. In order to do this, the site WEB1 first generates the session key which must be identical to that generated by the
25 browser during phase 3 of step 6. The site WEB1 can then decrypt the password PW using the session key VMK. To carry out this check, the site WEB1 queries the database BDD, and compares the identifier and the password received from the browser with those previously stored in the database BDD.

In our example, the site WEB1 also calculates the signature of the query
30 received, using the session key. It then compares the result with the signature included in the message.

Step 9

If the check result is positive, the authentication is finished. The private zone and the card can communicate. In our example, if the result is positive, the
5 site WEB1 sends to the card a page including:

- a plug-in VA
- a plug-in IVK
- a plug-in IRP

10

The purpose of this page, or more precisely the associated plug-ins, is to administer the private zone allocated to the site WEB1.

B) Administration

15 Once authentication has been carried out, the card is administered by plug-ins which allow the browser to use the private zone allocated to a site WEB1.

Consequently, during the ninth step, administration of the private zones starts. The browser executes this page, i.e. all plug-ins VA, IVK, IRP. The various execution phases of the plug-ins VA, IVK, IRP are listed in the
20 remainder of the description.

The plug-in VA

Firstly, it executes the plug-in VA. Figure 5 illustrates a diagrammatic example of the inputs PE2 for this plug-in. The plug-in VA carries out
25 authentication. This plug-in allows the site WEB1 to be authenticated by the browser BW1.

In our example, this plug-in VA includes input PE2 and output PS2 parameters. The output parameter is a signal indicating whether or not a transaction can be started. In our example, the input parameters PE2 are:

- 30
- the value of the identifier VASid allowing the browser to select the correct private zone;

- the value of the identifier USERID;
- security data.

Execution of the plug-in VA

5 Figure 5 is a conceptual view of the plug-in VA. This view illustrates the input and output parameters of this plug-in. In our illustrated example, execution of this plug-in VA includes several phases. In our example, these phases are as follows:

10 **Phase 1**

 The plug-in selects the private zone corresponding to the identifier VASid.

Phase 2

 The plug-in checks the value of the identifier USERID with that stored in
15 the private zone.

Phase 3

 The plug-in calculates a session key VSK using the master key VMK as well as other data, for example a random number, a signature, a synchronisation
20 counter, etc.

Phase 4

 The plug-in VA checks the security data i.e. the random number, the signature, the synchronisation counter, etc. This check guarantees that the
25 security data associated with the private zone in question corresponds to the security data of the private zone allocated to the site WEB1.

 If the check result is positive, the browser starts a secured transaction with the site WEB1 and the private zone allocated. Otherwise, no transaction is
30 started and the browser displays for example a public home page.

Preferably, when a transaction is started, the session key is stored since it may be used throughout a session. However, in our example of realisation, when the transaction is finished or the result of the check carried out in phase 4 is negative, the session key is erased from the memory.

5

A secured transaction remains open throughout the execution of the current page. Preferably, this transaction is closed when the browser receives a new page. Consequently, if a WEB site wants to use a secured transaction on several pages, it will have to insert the call of the plug-in VA at the start of each page sent to the browser.

10

If a transaction is started, the browser can execute the other two plug-ins IVK and IRP:

15 **The plug-in IVK**

Figure 6 is a conceptual view of the plug-in IVK. This view illustrates the input and output parameters of this plug-in.

The purpose of this plug-in is to load encrypted keys into the private zone. In our example of realisation, this plug-in includes several input parameters PE3 and an output parameter PS3. In our example, the input parameters are encrypted keys marked CK1-CKn which can be the master key VMK or the encryption/signature keys received from the site WEB1. These encryption/signature keys are the symmetric keys mentioned in the paragraph "State of the Art". They are part of the "application data" mentioned in the paragraph "the Invention". They will be used later to encrypt or sign information exchanged between the browser, in particular the private zone which has been allocated, and the site WEB1.

20
25

The output parameter PS3 is a signal indicating whether or not the loading operation was successful.

30

When the browser executes this plug-in IVK, it checks that a transaction has been started. In this case, the plug-in selects the private zone in question. Once the selection has been carried out, the plug-in decrypts the symmetric keys CK1-CKn received from the site WEB1 using the session key VSK and stores them in the private zone. The number of keys "n" is unimportant.

The plug-in IRP

Figure 7 is a conceptual view of the plug-in IRP. This view illustrates the input and output parameters of this plug-in.

10

In our example of realisation, the purpose of this plug-in IRP is to load either a home page encrypted in the private zone in question, or one or more encrypted resident pages. These pages are part of the "application data" mentioned in the paragraph "the Invention".

15

In our example of realisation, this plug-in IRP includes an input parameter CRP which is an encrypted resident page obtained from the site WEB1. This page can either be a home page or a resident page. The output parameter SCS/FAIL is a message indicating whether or not the pages were installed successfully.

20

When the browser executes the plug-in IPR, it checks that a secured transaction has been started. In this case, the plug-in selects the private zone in question. The plug-in then decrypts the page received using the session key VSK and stores the page in the private zone in question.

25

Step 10

During the tenth step, the results obtained by the various plug-ins started during step 8 are sent to the site WEB1.

Step 11

30

During an eleventh step, the site WEB1 checks the results obtained by the various above-mentioned plug-ins. If the results obtained are satisfactory, the

site WEB1 can use its private zone. In our example of realisation, the site WEB1 can carry out transactions by using the symmetric keys.

Step 12

- 5 During a twelfth step, the site WEB1 then sends to the browser a page which includes the plug-in VA, signature or encryption operations, a link to a resident page, etc.

Step 13

- 10 In our example, when the browser has received this page, the transaction is closed. The browser then executes the plug-in VA. If the check result is positive, the browser starts a new secured transaction with the site WEB1 and the allocated private zone. This is the utilisation phase of the private zone. The site WEB1 can thus carry out encryption and signature operations, using the
15 symmetric keys associated with the private zone in question. The browser can also access the private resident pages previously loaded by the plug-in IRP.

- This example of realisation clearly shows that a resource can be a WEB site or any other device able to communicate with a smart card. Note that the
20 verb "communicate" includes data exchange. We have seen in particular that the authorisation to use a private zone is carried out by a plug-in including at least one input parameter corresponding to a zone access key. In our example, this access key consists of the USERID and the password PW. We have also seen that the value of this key is supplied by all resources concerned, i.e. all
25 WEB sites in our example. This key VMK can encrypt information transiting between said zone and the set of resources. After execution and depending on this key, this plug-in can authorise access to a private zone and deny access to the other private zones.

- 30 In our example, we have seen how authentication between a private zone and a set of corresponding resources is carried out. The set of resources

transmits a request to the browser prompting the user to enter the access key received. Then, if the access key is correct, the device includes code instructions which can manage the authentication between a set of WEB sites and the corresponding allocated private zone.

5

We have also seen that the device interprets code instructions which, after the authentication step and using security information, can manage the administration of the private zones as well as the use of application data in these private zones during a communication between the browser and the WEB site.

10

In our example of realisation, we have seen that the security data includes at least one master key (VMK).

The invention also concerns the computer resource. The computer resource, especially the WEB site, includes means to communicate exclusively with a private zone ZP1 of a browser BW1. We have seen that the private zones are managed by a manager OP, preferably centralised. In the remainder of the document, this centralised manager will be more generally called centralised entity. This entity OP allocates a private zone to a resource WEB1 by transmitting to the resource security parameters, in particular parameters which can identify the allocated private zone VASid, at least one master key VMK stored in the allocated private zone. This key VMK can encrypt information transiting between said zone and the set of resources. We have seen that this information may consist of session keys CK1-CKn.

25

The resource according to the invention comprises secured means to transmit to said device

- a key PW-USERID to access a private zone;
- a password PW and/or a user identifier USERID,

The device uses the above parameter(s) to authenticate, during a communication between said resource and said device, the private zone with the computer resource WEB1.

5 The invention also concerns a smart card storing this type of browser.

The invention also concerns the communication method. The method includes the following steps:

- 10 - a step to create a number of private zones, where each private zone can be allocated to a respective set of resources and can store security information ensuring secured communication between a private zone and a set of resources;
- a step to allocate a private zone to a set of resources,
- a step to communicate between said allocated private zone and the set of
15 resources concerned, a plug-in denying access to another private zone during this communication.

Advantageously, we have seen that the allocation of a private zone is managed by an entity OP. This entity allocates a private zone of the card to the
20 set of WEB resources by supplying information, including at least:

- the reference VASId of the private zone,
- and the value of a master key VMK stored previously in the corresponding private zone, this key being able to encrypt information transiting between the private zone and the set of resources. We then see that, using this key
25 (VMK), the link between the zone and the WEB site can be secured.

In our example, we have seen that the set of WEB resources transmits by a secured transmission means at least one access key (USERID,PW) associated with a private zone, said key being used to execute a plug-in able,
30 after execution, to authorise access to a private zone and deny access to the other private zones.

In our example, we have also seen that, in order to open a secured transaction, the set of resources WEB1 transmits a plug-in which can check whether the security information written in the private zone ZP1 corresponds to
5 the security information stored in a memory attached to the set of resources WEB1.

We have seen, in our example of realisation, that in order to implement this method, plug-ins must be installed both in the device and in the set of resources.
10 These plug-ins include in particular the authentication plug-in VBA and a plug-in stored on an entity which can manage the allocation of private zones.

The authentication plug-in includes at least one input parameter PE1 corresponding to a zone access key (USERID,PW), the value of this key being
15 supplied by the set of resources to said device. After execution and depending on this key, this plug-in VBA can authorise or deny access to a private zone and deny access to the other private zones if the access is authorised.

The purpose of the allocation plug-in, when it is executed on said entity, is to allocate a private zone ZP1 of said browser BW1 to a set of resources WEB1
20 by supplying information including at least the reference (VASId) of the private zone ZP1.

We see that this invention offers numerous advantages. Through this mechanism which "partitions" the information accessible by a browser, the encryption keys and the local pages associated with a private zone can only be
25 accessed by the WEB site concerned and not by other WEB sites. Consequently, this partitioning mechanism provides access only to the WEB sites which installed them.

This solution also meets a second market requirements concerning the
30 installation of local (or "resident") pages accessible by the browser. The WEB sites can install local pages through a secured transmission and only allow

access to the user after authentication. Since these local pages are "the property" of a particular WEB site, they can no longer be erased by installation of pages from another WEB site.

Claims

1. Data processing device (MOB1) which can communicate with a number of sets of resources (WEB1,WEB2) via a browser (BW1), characterised in that the browser (BW1) comprises a number of private zones (ZP1-ZP2), where each private zone can be allocated to a respective set of resources (WEB1) to store information, said device comprising a plug-in (VBA) ensuring that a set of resources (WEB1) communicates exclusively with the private zone (ZP1) allocated to it.
2. Device according to claim 1, characterised in that said plug-in (VBA) comprises at least one input parameter (USERID,PW) corresponding to a zone access key, the value of this access key being supplied through a secured transmission by the set of resources concerned (WEB1) to said device, said plug-in, after execution and depending on the key, being able to authorise access to a private zone (ZP1), and deny access to the other private zones (ZP2) of said browser (BW1).
3. Device according to claim 1 or 2, characterised in that, for the authentication step, the set of resources (WEB1) transmits a request to the browser prompting the user to enter an access key (USERID, PW) received, and in that if the access key is correct, the plug-in (VBA) comprises code instructions which can manage the authentication between a set of resources (WEB1) and the corresponding allocated private zone (ZP1).
4. Device according to claim 1, characterised in that each zone (ZP1-ZP2) can store information, in particular security information ensuring secured communication between a private zone (ZP1) and a set of resources (WEB1).
5. Device according to claim 1 or 4, characterised in that it interprets code instructions which, after the authentication step and using security information

stored in the private zone concerned, can manage the administration of the private zones as well as the use of application data in these private zones during a communication between the browser and the set of resources (WEB1).

5 6. Computer resource (WEB1), in particular a WEB site, communicating with a data processing device (MOB1) via a network, characterised in that said device includes a browser (BW1) as defined in claim 1, and in that said computer comprises a plug-in which, when executed, can obtain the allocation of a private zone (ZP1), said allocation ensuring that the communication between said
10 private zone (ZP1) and said resource (WEB1) is exclusive.

7. Resource according to claim 6, characterised in that the private zones are managed by an entity (OP), and in that this entity (OP) allocates a private zone (ZP1) to a resource (WEB1), said entity transmitting to said resource security
15 parameters, in particular parameters which can identify the allocated private zone (VAS id).

8. Resource according to claim 7, characterised in that said entity transmits to said resource at least one master key (VMK) previously stored in the allocated
20 private zone, said key being able to encrypt information transiting between said zone and the set of resources.

9. Resource according to claim 6, characterised in that it comprises secured means to transmit to said device a key (PW,USERID) to access a private zone,
25 said device using this key, during communication between said resource and said device, to authenticate the private zone with the computer resource (WEB1).

10. Manager (OP), in particular an operator, which can manage the use of said
30 device as defined in claim 1, characterised in that it comprises a plug-in which can manage, upon request, the allocation of a private zone (ZP1) to a set of

resources by supplying to said set of resources information comprising at least the reference (VASId) of a private zone (ZP1).

11. Smart card (CARD1) which can communicate with a number of sites (WEB1) via a browser (BW1), characterised in that:

- the browser comprises a number of private zones (ZP1-ZP2), where each private zone can be allocated to a respective set of sites and can store security information ensuring secured communication with a set of sites;
- and in that the browser (BW1) interprets code instructions ensuring that a set of sites (WEB1) communicates exclusively with the private zone (ZP1) allocated to it.

12. Communication method between a data processing device (MOB1) comprising a browser (BW1) and a set of resources (WEB1), characterised in that it comprises the following steps:

- a step to create, in said browser, a number of private zones (ZP1-ZP2), where each private zone can be allocated to a respective set of resources and can store security information ensuring secured communication between said private zone and a set of resources;
- a step to allocate a private zone (ZP1) to a set of resources (WEB1),
- a step to communicate between said allocated private zone (ZP1) and the set of resources concerned (WEB1), a plug-in denying access during this communication to any private zone other than the allocated zone (ZP1).

13. Method according to claim 12, characterised in that the allocation of a private zone (ZP1) is managed by an entity (OP), and in that this entity allocates a private zone (ZP1) of the card (CARD1) to the set of resources (WEB1) by supplying information comprising in particular the reference (VASId) of the allocated private zone (ZP1).

14. Method according to claim 13, characterised in that the information comprises the value of a master key (VMK) previously stored in the corresponding private zone (ZP1), this key being able to encrypt information transiting between said zone and the set of resources during a communication.

5

15. Method according to claim 12, characterised in that the set of resources (WEB1) transmits by a secured transmission means at least one access key (USERID,PW) associated with a private zone (ZP1), said key being used to execute a plug-in able, after execution, to authorise access to a private zone (ZP1) and deny access to the other private zones (ZP2).

10

16. Method according to claim 12, characterised in that, in order to open a secured transaction, the set of resources (WEB1) transmits a plug-in which can check whether the security information written in the private zone (ZP1) corresponds to the security information stored in a memory attached to the set of resources (WEB1).

15

17. Computer plug-in (VBA) for a data processing device (MOB1) which can communicate with a number of resources (WEB1,WEB2) via a browser (BW1), characterised in that the browser comprises a number of private zones (ZP1-ZP2), where each private zone (ZP1) can be allocated to a respective set of resources (WEB1) and can store information specific to this set of resources (WEB1), and in that the plug-in comprises at least one input parameter corresponding to a key (USERID,PW) to access a zone, the value of this key being supplied to said device by the set of resources concerned, said plug-in, after execution and depending on this key, being able to authorise or deny access to a private zone and deny access to the other private zones if the access is authorised.

20

25

18. Computer program (OPG) stored in a manager entity (OP) which can manage private zones as defined in claim 1, the purpose of said program being,

30

when it is executed on said entity, to allocate a private zone (ZP1) of said browser (BW1) to a set of resources (WEB1) by supplying information including at least the reference (VASId) of the private zone (ZP1).

1/2

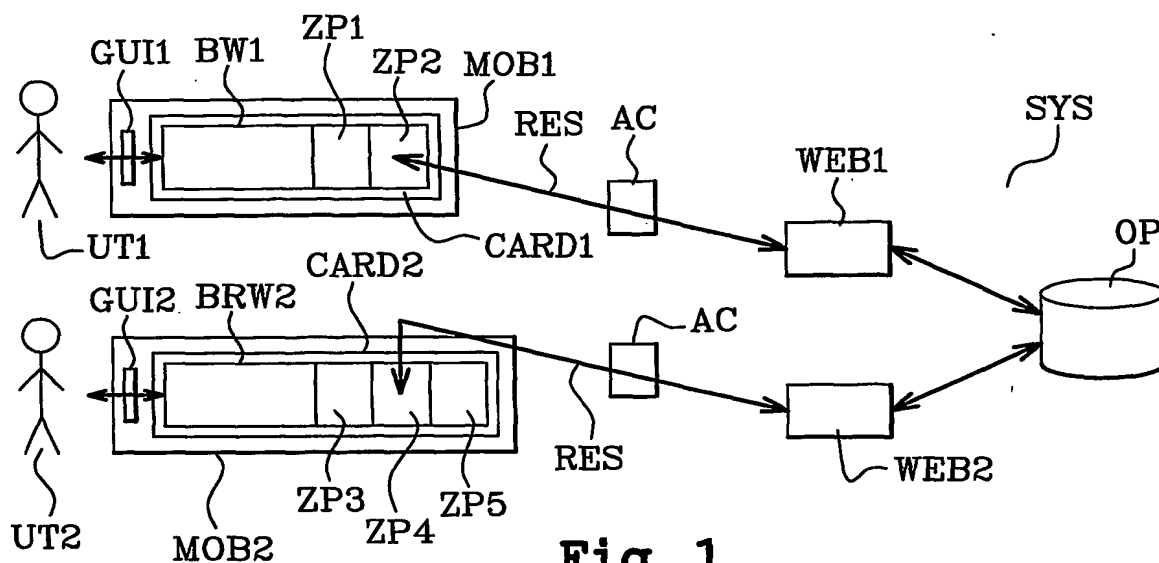


Fig. 1

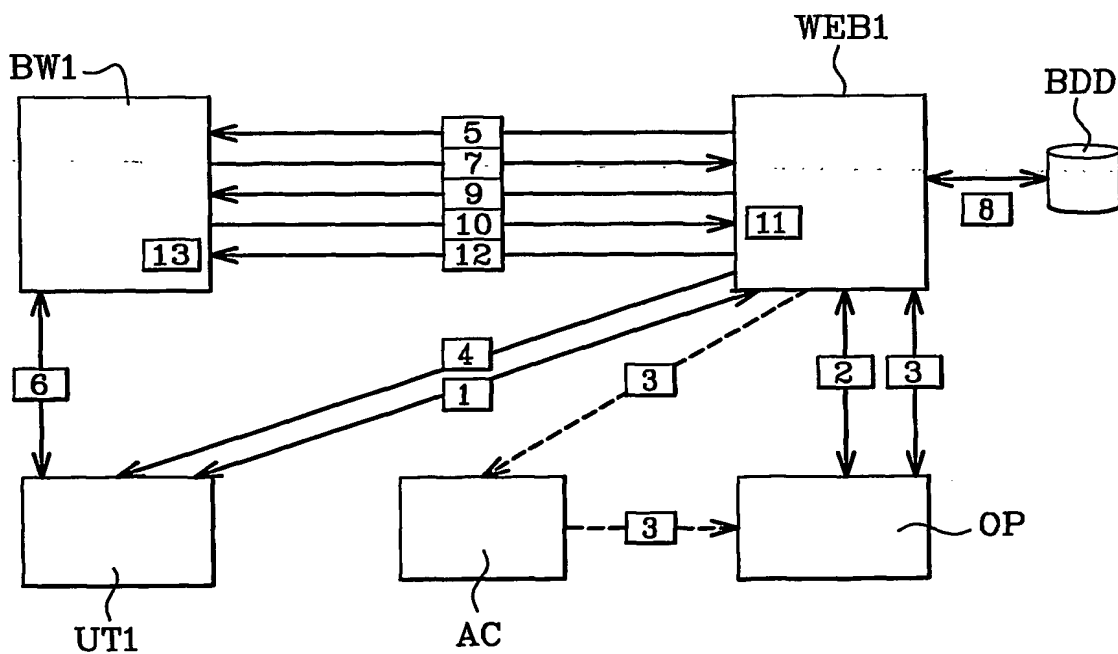


Fig. 3

2/2

Fig. 2

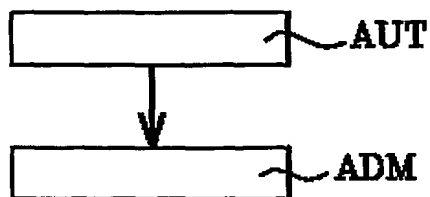


Fig. 4

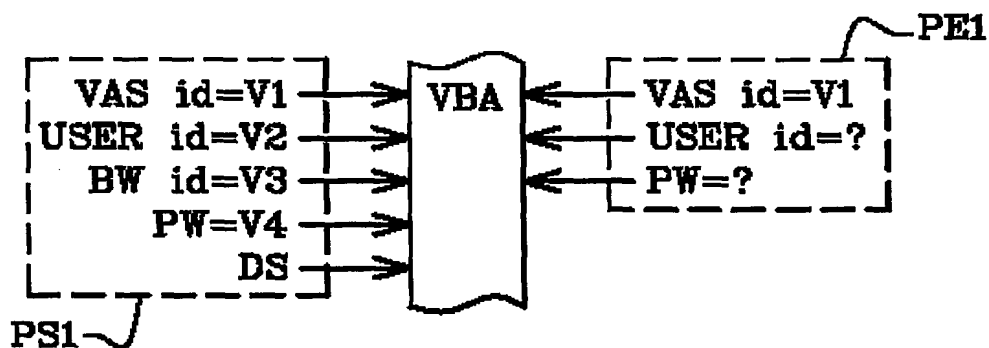


Fig. 5

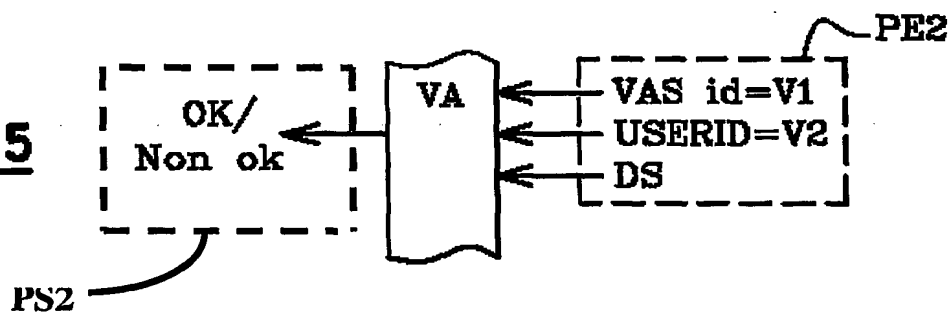


Fig. 6


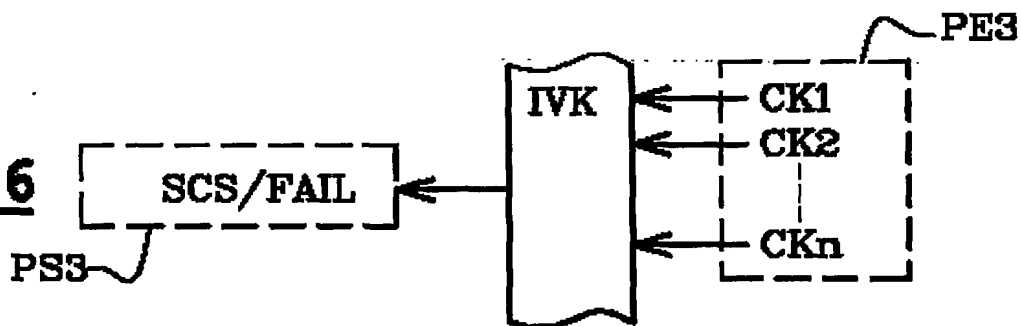


Fig. 7

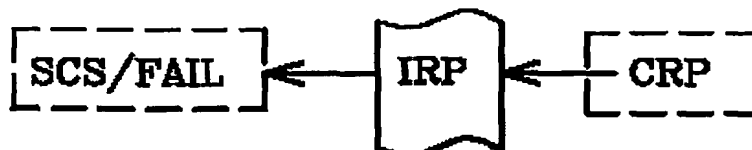

INTERNATIONAL SEARCH REPORT

 Internatio Application No
 P B 03/03374

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04L29/06 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | "Entrust Secure Web Portal Solution for Microsoft Windows NT on Intel Architecture" INTEL WHITE PAPER, XX, XX, May 2001 (2001-05), pages 1-31, XP002199131 | 1-10,12, 15-18 |
| Y | page 2 -page 3 page 9 page 16 page 19 | 11,13,14 |
| Y | WO 98 57474 A (GEMPLUS CARD INT ;MARTINEAU PHILIPPE (FR); MERRIEN LIONEL (US); SI) 17 December 1998 (1998-12-17) abstract page 6, line 5 -page 7, line 4 page 9, line 7 -page 10, line 20 page 13, line 21 -page 14, line 11 -/-- | 11,13,14 |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

10 November 2003

Date of mailing of the international search report

26/11/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Figiel, B

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/JP 03/03374

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | EP 1 091 598 A (CIT ALCATEL) 11 April 2001 (2001-04-11) abstract; figure 1 column 2, line 16 - line 43 column 3, line 17 - line 21 column 4, line 43 - line 55 column 5, line 53 - column 6, line 6 column 7, line 27 - line 30 | 1, 6, 12 |
| A | WO 01 41392 A (TEO KENG WUI DANIEL ; FOONG SUI JIN (SG); THIA KOK SOON (SG); YAP T) 7 June 2001 (2001-06-07) abstract; figures 1-7 page 1, line 29 - page 3, line 4 page 6, line 15 - page 9, line 4 | 10 |
| A | WO 00 11832 A (VISTO CORP) 2 March 2000 (2000-03-02) abstract; figure 1 page 3, line 5 - page 4, line 2 page 8, line 12 - line 23 | 1-5 |
| A | WO 02 31760 A (GEMPLUS CARD INT ; FARRUGIA AUGUSTIN J (US)) 18 April 2002 (2002-04-18) abstract; figure 1 page 3, line 20 - page 4, line 2 | 1-5 |

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/JP 03/03374


| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|---|--|
| WO 9857474 | A | 17-12-1998 | AU 8113798 A CN 1284230 T EP 1050145 A1 WO 9857474 A1 TW 378308 B ZA 9805151 A | 30-12-1998 14-02-2001 08-11-2000 17-12-1998 01-01-2000 13-04-1999 |
| EP 1091598 | A | 11-04-2001 | EP 1091599 A1 EP 1091598 A1 CA 2322365 A1 JP 2001184306 A | 11-04-2001 11-04-2001 08-04-2001 06-07-2001 |
| WO 0141392 | A | 07-06-2001 | AU 4500301 A WO 0141392 A2 | 12-06-2001 07-06-2001 |
| WO 0011832 | A | 02-03-2000 | WO 0011832 A1 CA 2341213 A1 EA 3374 B1 EP 1105996 A1 JP 2002523973 T | 02-03-2000 02-03-2000 24-04-2003 13-06-2001 30-07-2002 |
| WO 0231760 | A | 18-04-2002 | AU 1458402 A WO 0231760 A2 | 22-04-2002 18-04-2002 |

PCTNOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

From the INTERNATIONAL BUREAU

To:

SCHLUMBERGER SYSTEMES
C/O Schlumberger Systèmes
50 avenue Jean-Jaurès
F-92120 Montrouge
FRANCEDate of mailing (day/month/year)
26 February 2004 (26.02.2004)Applicant's or agent's file reference
76.0708**IMPORTANT NOTICE**International application No.
PCT/IB2003/003374International filing date (day/month/year)
19 August 2003 (19.08.2003)Priority date (day/month/year)
19 August 2002 (19.08.2002)

Applicant

SCHLUMBERGER SYSTEMES et al

1. Notice is hereby given that the International Bureau has **communicated**, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this notice:

AU, AZ, BY, CH, CN, CO, DZ, EP, HU, JP, KG, KP, KR, MD, MK, MZ, RU, TM, US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

AE, AG, AL, AM, AP, AT, BA, BB, BG, BR, BZ, CA, CR, CU, CZ, DE, DK, DM, EA, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, ID, IL, IN, IS, KE, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MG, MN, MW, MX, NI, NO, NZ, OA, OM, PG, PH, PL, PT, RO, SC, SD, SE, SG, SK, SL, SY, TJ, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this notice is a copy of the international application as published by the International Bureau on 26 February 2004 (26.02.2004) under No. WO 2004/017598

4. **TIME LIMITS for filing a demand for international preliminary examination and for entry into the national phase**

The applicable time limit for entering the national phase will, **subject to what is said in the following paragraph**, be **30 MONTHS** from the priority date, not only in respect of any elected Office if a demand for international preliminary examination is filed before the expiration of **19 months** from the priority date, but also in respect of any designated Office, in the absence of filing of such demand, where Article 22(1) as modified with effect from 1 April 2002 applies in respect of that designated Office. For further details, see *PCT Gazette* No. 44/2001 of 1 November 2001, pages 19926, 19932 and 19934, as well as the *PCT Newsletter*, October and November 2001 and February 2002 issues.

In practice, **time limits other than the 30-month time limit** will continue to apply, for various periods of time, in respect of certain designated or elected Offices. For **regular updates on the applicable time limits** (20, 21, 30 or 31 months, or other time limit), Office by Office, refer to the *PCT Gazette*, the *PCT Newsletter* and the *PCT Applicant's Guide*, Volume II, National Chapters, all available from WIPO's Internet site, at <http://www.wipo.int/pc/en/index.html>.

For filing a **demand for international preliminary examination**, see the *PCT Applicant's Guide*, Volume I/A, Chapter IX. Only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination (at present, all PCT Contracting States are bound by Chapter II).

It is the applicant's **sole responsibility** to monitor all these time limits.

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

Gijsbertus Beijer - Carlos Roy

Facsimile No.(41-22) 740.14.35

Telephone No.(41-22) 338.91.11

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

To:

AXALTO SA
c/o Vincent YQUEL
50 avenue Jean-Jaurès
F-92120 Montrouge
France

Date of mailing (day/month/year)

02 December 2004 (02.12.2004)

Applicant's or agent's file reference

76.0708

IMPORTANT NOTIFICATION

International application No.

PCT/IB2003/003374

International filing date (day/month/year)

19 August 2003 (19.08.2003)

1. The following indications appeared on record concerning:

☒

the applicant

☐

the inventor

☐

the agent

☐

the common representative

Name and Address

SCHLUMBERGER SYSTEMES
50 avenue Jean-Jaurès
F-92120 Montrouge
France

State of Nationality

FR

State of Residence

FR

Telephone No.

33 1 - 46 00 63 22

Facsimile No.

33 1 - 46 00 70 26

Teleprinter No.

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐

the person

☒

the name

☐

the address

☐

the nationality

☐

the residence

Name and Address

AXALTO SA
50, avenue Jean Jaurès
F-92120 Montrouge
France

State of Nationality

FR

State of Residence

FR

Telephone No.

+33 1 46 00 48 98

Facsimile No.

+33 1 46 00 70 26

Teleprinter No.

3. Further observations, if necessary:

CORRECTED VERSION OF THE NOTIFICATION FORM PCT/IB/306 MAILED ON 12 AUGUST 2004

4. A copy of this notification has been sent to:

☒

the receiving Office

☒

the designated Offices concerned

☐

the International Searching Authority

☐

the elected Offices concerned

☐

the International Preliminary Examining Authority

☐

other:

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

V. BLANC

Facsimile No. (41-22) 338.70.60

Telephone No. (41-22) 338 9666

PATENT COOPERATION TREATY

PCT/IB2003/003374

PCTINFORMATION CONCERNING ELECTED
OFFICES NOTIFIED OF THEIR ELECTION

(PCT Rule 61.3)

From the INTERNATIONAL BUREAU

To:

AXALTO SA
c/o Vincent YQUEL
50 avenue Jean-Jaurès
F-92120 Montrouge
FRANCE

REC 5 10

11 JAN. 2005

Rép: _____

Date of mailing (day/month/year)

06 January 2005 (06.01.2005)

Applicant's or agent's file reference

76.0708

lukasz

IMPORTANT INFORMATION

International application No.

PCT/IB2003/003374

International filing date (day/month/year)

19 August 2003 (19.08.2003)

Priority date (day/month/year)

19 August 2002 (19.08.2002)

Applicant

AXALTO SA et al

1. The applicant is hereby informed that the International Bureau has, according to Article 31(7), notified each of the following Offices of its election:

EP: AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR**National:** BG, CA, CN, CZ, DE, JP, KP, KR, MN, NO, PL, RO, RU, SK, US

2. The following Offices have waived the requirement for the notification of their election; the notification will be sent to them by the International Bureau only upon their request:

AP: GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW**EA:** AM, AZ, BY, KG, KZ, MD, RU, TJ, TM**OA:** BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG**National:** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BR, BY, BZ, CH, CO, CR, CU, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MW, MX, MZ, NI, NZ, OM, PG, PH, PT, SC, SD, SE, SG, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW

3. The applicant is reminded that he must enter the "national phase" before the expiration of 30 months from the priority date before each of the Offices listed above. This must be done by paying the national fee(s) and furnishing, if prescribed, a translation of the international application (Article 39(1) (a)), as well as, where applicable, by furnishing a translation of any annexes of the international preliminary examination report (Article 36(3) (b) and Rule 74.1).

Some offices have fixed time limits expiring later than the above-mentioned time limit. For detailed information about the applicable time limits and the acts to be performed upon entry into the national phase before a particular Office, see Volume II of the PCT Applicant's Guide.

The entry into European regional phase is postponed until 31 months from the priority date for all States designated for the purposes of obtaining a European patent.

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

Gabriele Bähr

Facsimile No.+41 22 740 14 35

Facsimile No.+41 22 338 70 60

INTERNATIONAL SEARCH REPORT

Internatio application No

PCT/IB 03/03374

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04L29/06 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | "Entrust Secure Web Portal Solution for Microsoft Windows NT on Intel Architecture" INTEL WHITE PAPER, XX, XX, May 2001 (2001-05), pages 1-31, XP002199131 | 1-10,12, 15-18 |
| Y | page 2 -page 3 page 9 page 16 page 19 | 11,13,14 |
| Y | WO 98 57474 A (GEMPLUS CARD INT ;MARTINEAU PHILIPPE (FR); MERRIEN LIONEL (US); SI) 17 December 1998 (1998-12-17)- abstract page 6, line 5 -page 7, line 4 page 9, line 7 -page 10, line 20 page 13, line 21 -page 14, line 11 | 11,13,14 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

10 November 2003

Date of mailing of the international search report

26/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Figiel, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/03374

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | EP 1 091 598 A (CIT ALCATEL) 11 April 2001 (2001-04-11) abstract; figure 1 column 2, line 16 - line 43 column 3, line 17 - line 21 column 4, line 43 - line 55 column 5, line 53 - column 6, line 6 column 7, line 27 - line 30 --- | 1,6,12 |
| A | WO 01 41392 A (TEO KENG WUI DANIEL ;FOONG SUI JIN (SG); THIA KOK SOON (SG); YAP T) 7 June 2001 (2001-06-07) abstract; figures 1-7 page 1, line 29 -page 3, line 4 page 6, line 15 -page 9, line 4 --- | 10 |
| A | WO 00 11832 A (VISTO CORP) 2 March 2000 (2000-03-02) abstract; figure 1 page 3, line 5 -page 4, line 2 page 8, line 12 - line 23 --- | 1-5 |
| A | WO 02 31760 A (GEMPLUS CARD INT ;FARRUGIA AUGUSTIN J (US)) 18 April 2002 (2002-04-18) abstract; figure 1 page 3, line 20 -page 4, line 2 ----- | 1-5 |